

# 460/469 APTITUDE HD LIFT-LID STUDENT DESK

**usacapitol**  
PREMIUM QUALITY CLASSROOM FURNITURE

Extra deep (5") lift-lid bookbox desk has extra deep storage. The welded in-box pencil tray is made to be easily accessible and has plenty room. The lift-lid hinge is a full length piano type hinge welded to the bookbox. Safety bumpers keep operation quiet and fingers safe.



## H I G H L I G H T S

- Premium Quality
- Welded Pencil Tray
- 18 Gauge Legs
- Welded Under Structure
- Lifetime Frame Warranty
- Adjustable or Fixed Height
- 3 Standard Top Colors
- \*Unlimited Color Matching

### Aptitude™ 460/469 Lift-Lid Student Desk Specifications

**Frame:** All-tubular design, 1" diameter, 18-gauge front leg running from side to side is multiple arc welded to a integral 1", 18-gauge U-shaped top support and rear leg. 5/8", 18 gauge tubular U-brace is inserted into punched holes in the rear legs and welded to all four legs. Minimum 4-1/2" of total weld. Frame is chrome plated or painted after all welding is complete.

#### Standard Chrome Finish:

Chrome is comprised of metal layers (Nickel & Chromium) electrostatically bonded to metal. Our standard is 4-6 mills (25%-50% more than our competitors) of Nickel-it will not scratch. Our product is chromed on plateable quality tubing after all welding is completed to prevent rusting on unfinished welds.

**Bookbox:** Lift-Lid: 22-1/4" x 16" x 5" deep, 20-gauge, one piece, seamless, deep drawn steel box. Embossed shelf and stamped pencil tray. Top attached by full length piano hinge riveted to box and two silent friction hinges which control top. Bookbox is riveted to frame at five points.

**Bookbox Colors:** Available in standard Textured Black and Textured Titanium. Optional Textured Navy and Textured Sand. Textured powdercoating hides fingerprints and improves surface wear life.

**Inserts:** 86" diameter, nickel/chrome plated tubing with punched holes to receive adjusting screws. Leg adjustment uses self-tapping locking screws which pass completely through both upper leg and lower insert.

**Glides:** Glide base material will be thermo-molded from synthesized hybrid copolymers. Glide material must not retain dirt or grit. Glide

attachment will be a standard internal gripping spring steel umbrella at least 5/8" diameter or larger. The glide will have a ferrule. Glide casing and ferrule shall be constructed of durable case hardened steel; no plastic. The glide will be of full swivel design, silent and firm fitting for positive attachment and retention. All glides must make full level contact with the floor and the maximum swivel angle of the glide shall not be violated. All glides must be factory installed and permanently attached. Non permanent after market glide caps can be hazardous when detached and will not be considered.

**Top:** Solid molded thermoset plastic. 18" x 24" x 5/8" with smooth molded edges and permanent color throughout thickness. Pencil groove. Top is attached using self-tapping screws into seven uniformly drilled holes.

**Top Colors:** Available in standard Beige, optional Grey, Charcoal, Oak (not pictured), and Walnut.

#### Warranty:

- Limited Lifetime Frame Warranty
- Ten Year Comprehensive Warranty

#### Models:

- 469•29-1/2" Fixed Heights
- 460•23-1/2"-29-1/2" Adjustable at 1" Increments.



## D E S K F E A T U R E S

- Safe, bracketless continuous all-tubular frame
- Heavy-Duty inserted U-brace support
- Plateable-quality heavy-gauge steel
- 5/8" warp-free top with pencil groove
- High-quality chrome inserts
- Long-ferrule inside holding nylon glides
- Superior extra-long frame welds
- Locking-screw insert attachment
- One-piece, seamless, deep drawn, steel bookbox
- Embossed bookboxes reinforced with a steel rod minimizes noise vibration when moving


## O P T I O N S

- Adjustable or fixed height models
- Steel glides


Standard Hard Plastic Top Colors:



Optional Hard Plastic Top Colors:

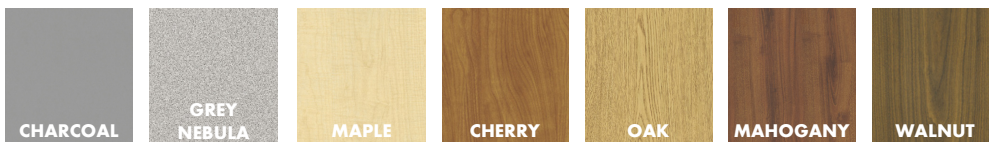

Standard Powdercoated Frame Colors:



Optional Powdercoated Frame Colors:



Special Powdercoated Frame Colors Available

